



Features an integrated overflow

Andrea® 24



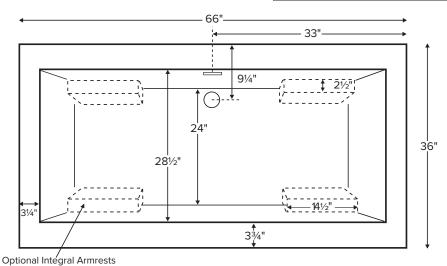


Drain Rough-In Measurement



Requires use of a wall-mounted or freestanding tub filler.

Shown as Soaker.



ELECTRICAL COMPONENTS & SPECIFICATIONS

| Hydrotherapy Package | Components Included | 110V GFCI |
|----------------------|------------------------------|-----------|
| Air Massage | heated blower | 1-15 amp |
| Air Massage Elite | heated blower, chromatherapy | 1-15 amp |

Electrical requirements may change with the addition of optional therapy components.

See specific option details or installation information. CSA Certified C/US; B45.5/IAPMO ANSI Z124.1 and ANSI 112.19.7

See the Installation & Operation Manual for more details. MTI's Customer Service: Monday-Friday 8am-6pm EST 800-783-8827 or service@mtibaths.com

- Before discarding tub packaging, check for accessories that may be packaged inside.
 All product measurements are ±1/2".
 Specifications and configurations are subject to change without notice.
 Measurements herein supersede all others published prior to publication date below.

IMPORTANT ORDERING & INSTALLATION INFORMATION:

- · Before ordering or installing, please consider future access to equipment.
- No access panel. Tub features slotted integrated overflow with toe tap drain.
- Air baths require job site preparations for remote mounting the blower and required check valve. Check valve must be installed higher than the rim of the tub.
- Hydrotherapy equipment may ship loose for remote installation depending on tub model. See package content on the following page for details.
- Radiance placed on floor locations will affect placement of air jets.
- Faucet valves cannot be installed on this tub model.
- All tubs are in accordance with CSA B45.5/IAPMO Z124 standard and compliant with ASTM C 1028-07 coefficient of friction. DoloMatte meets ANSI A137.1/A326.3 coefficient of friction and AS HB198:2014 pendulum slip resistance testing.



- Airbath blower ships loose for remote installation on site.
- See the Installation & Operation Manual for more details.

Andrea® 24 MODEL 210 66" x 36" x 23"

| Hydrotherapy | Package Contents | Acrylic CXL® | | DoloMatte® | |
|-------------------|---|--------------|----------|------------|----------|
| Packages | | Part # | MSRP | Part # | MSRP |
| Soaker | Soaking bath - no jets; includes a pre-leveled foam base. Integrated slotted overflow with toe-tap drain in chrome. | S210 | \$6,075 | S210DM | \$6,795 |
| Air Massage | 20 air jets, heated air blower, pre-leveled foam base. Blower and control boxes must be remote located. Integrated slotted overflow with toe-tap drain in chrome. | AST210 | \$9,360 | AST210DM | \$10,080 |
| Air Massage Elite | 30 air jets, heated air blower, Chromatherapy LED lighting, Spa Mode, pre-leveled foam base. Blower and control boxes must be remote located. Integrated slotted overflow with toe-tap drain in chrome. | AE210 | \$11,070 | AE210DM | \$11,790 |

RECOMMENDED SENSORY THERAPIES

Chromatherapy

(LE) \$800 underwater lighting 2 LED lights included

Audiotherapy

(STEREOBT) **\$1,390** 2 transducers with bluetooth and amplifier (BTREMOTE) \$600 bluetooth remote (STEREOH202) \$1,575 4 transducers amplifier not included

Thermaltherapy

(RAD100) **\$1,595** Radiance® 2 heated zones included

Options Must be ordered at time of purchase

Standard Colors White (CWH) DoloMatte available in matte white only. Biscuit (CBS) Not available for DoloMatte.

Quick Ship reduces lead time (QSPRI) \$430

Please call for availability

Textured Bottom (TXTBTM) Acrylic CXL® only \$105

DoloMatte® exceeds ANSI A137.1/A326.3 and AS HB198 slip tests.

Integral Armrests - 2 pair (INTARM2) \$295

Accessories

Pillows from \$180

Teak Bath Mat (TKMAT3018) \$815

Custom sizes also available. Contact MTI for details and pricing.

Teak Tub Tray

Slatted (TK-TRAY1) \$500 Solid (TK-TRAY2) \$570

Teak Seat (TK-REMSEAT) \$660

For use with armrests only.

Floor-Mounted High-Flow Tub Filler

Contemporary

Chrome (FILLC) \$1,480

Brushed Nickel (FILLBN) \$1,710

Faucet Stand SculptureStone® Standard

Small 3-hole capacity Large 5-hole capacity 141/4" w x 213/4" h 22" w x 213/4" h Matte (STAND) \$725 Matte (STANDL) \$855

+\$430 gloss finish upcharge (SSGLOSSSNK)

Drains & Overflow Kits Must be ordered at time of purchase

Integrated Overflow with Toe Tap **Slotted Overflow**

PVC drain - Chrome (SLOTIOC) included

Finish Upcharge

White (SLOTIOWHU) \$65

Brushed Nickel (SLOTIOBNU) \$65

Polished Nickel (SLOTIOPNU) \$105

Round Overflow

Chrome (RIOC) may substitute slotted overflow

Finish Upcharge

White (RIOWH) \$120

Brushed Nickel (RIOBN) \$120

Polished Nickel (RIOPN) \$120

Brass Tailpiece (WIOBS) \$85

May be ordered separately