

BT0305N17.01 SPECIFICATIONS

azure-4 blu-stone™ freestanding bathtub

FEATURES:

- Freestanding, blu-stone™ bathtub with end drain
- Streamlined, high profile one piece design
- 67" (1700mm) L x 31½" (800mm) W x 19¾" (500mm) H
- Includes integral slot overflow & matching blu-stone™ waste cover
- Suitable for left or right drain installation
- Made of blu-stone™ providing the look and feel of natural stone
- Stronger and more durable than acrylic
- Non-porous, stain resistant surface that does not require sealing
- Does not promote bacteria, mold or fungi
- Tailpiece not included (Blu recommends BTWaste.RN or BTWaste.Cl.RN)

SPECIFICATIONS:

Basin Area:	48¼" (1225mm) x 20¾" (525mm)*
Top Area:	64½" (1637mm) x 30" (764mm)*
To Overflow:	2½" (65mm)*
Slope of Backrest:	60°*
Water Depth:	15¼" (385mm)*
Capacity:	82.5G (313L)*
Weight:	254lbs (102kg)*
Hot water supply req'd:	Should be 70% of water capacity of tub or greater
Warranty:	Five Year Warranty (Residential use) One Year Warranty (Commercial use)
Material:	blu-stone™
Shipping Weight:	330lbs (150kg)*
Shipping Dimensions	(LWH) 71¾" x 36¼" x 28½" (1823mm x 923mm x 723mm)*

COLORS/FINISHES:

White Matte or Gloss as standard
Available in a range of blu-stone™ colors + finishes (special order)

ACCESSORIES (sold separately):



- BTWaste.RN or BTWaste.Cl.RN Island tub drain for easy installation

INSTALLATION NOTES:

Install this product according to the installation guide.
Floor support under bath must provide for a minimum of 1400 lbs (635kg). Installation will vary. Our products must be installed by certified professionals only and according to our installation guide as well as federal, provincial / state and local building codes and regulations

CODES / STANDARDS APPLICABLE:

- Meets or exceeds ANSI / ASME standard CSA B45.5.11 / IAPMO Z124
- IAPMO / ANSI Z124.8
- CSA

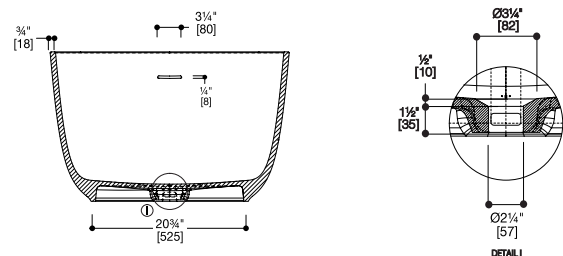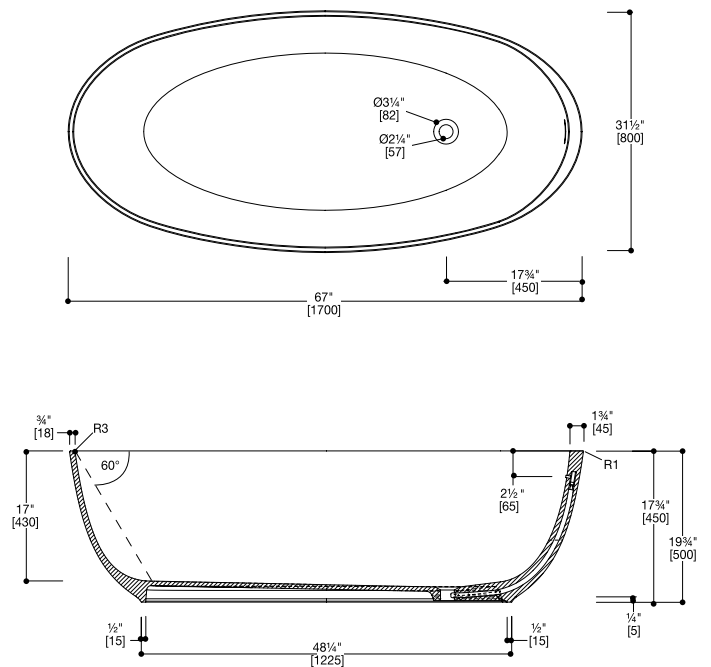

*Approximate measurements for comparison only.

Note: These dimensions and specifications are subject to change without notice.