

Steampunk Bay™

WALL TUB SPOUT

TS-85-85


Features


- Max flow rate: 16 gpm (60.6 L/min) at 60 psi For use with Style Therm, 3-VR or 2-VR valves All brass construction

- Over 30 finishes including 15 PVD finishes



Codes/Standards Applicable Product meets or exceeds the following: • ASME A112.18.1/CSA B125.1

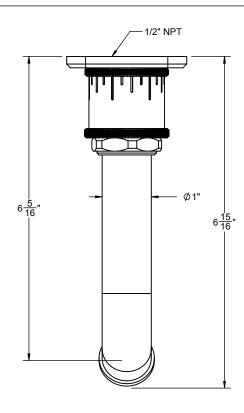



THROUGH HOLE SPECIFICATIONS			
MIN	RECOMMENDED	MAX	

Ø1-1/4"

Ø 1-9/16"

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

ALL DIMENSIONS SHOWN TO NEAREST 1/16"

SPOUT: Ø1"