


G-1852-C14U



Information

- Floor-mounted spout installation
- Aerated Flow Rate ~10.6 gpm @45 psi
- 9-7/8" spout reach
- 37"- 40" spout height
- Optional in-line pressure balancing valve
- Wall-mounted handle installation

G-1852 SADE Series

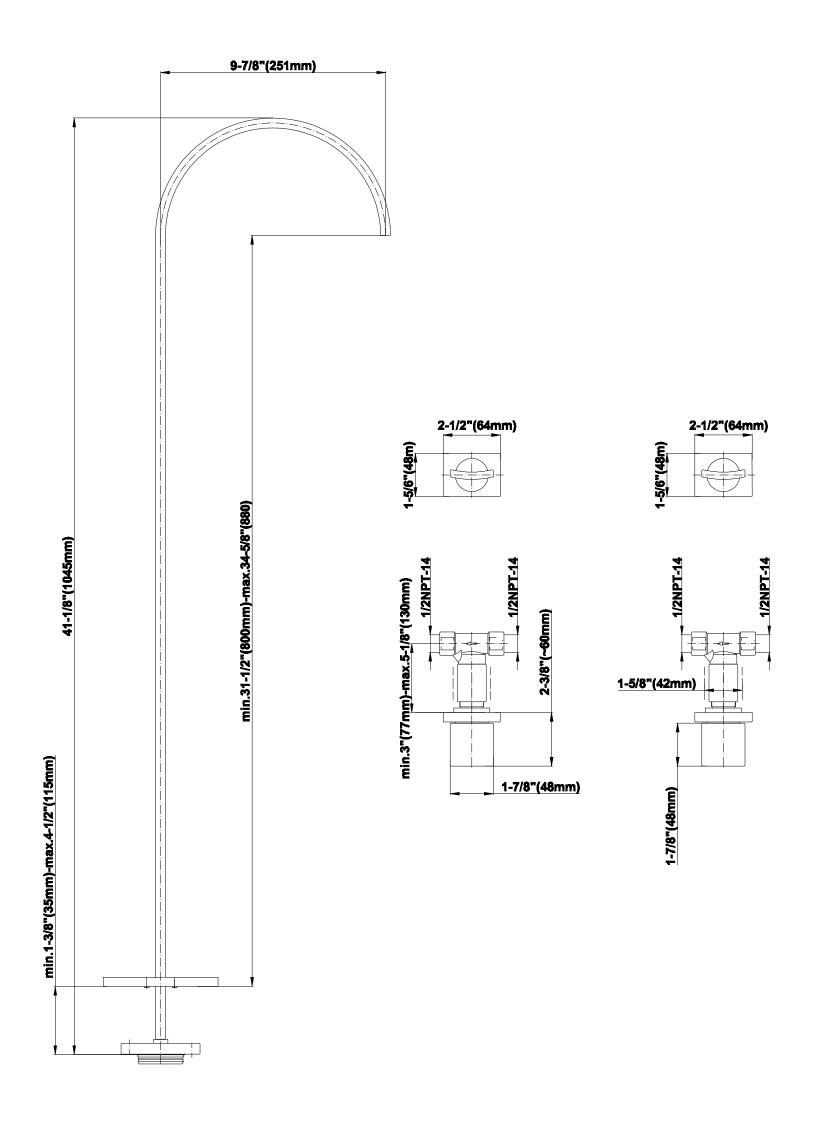





C14U-BS





Finishes



24K Gold



Gold



Black™



24K Brushed Architectural Matte Black Olive Bronze





Polished Chrome




Polished Nickel




SteeInox® (Satin Nickel)



C14U-BS, VS, WS LUNA, SADE, TARGA Series

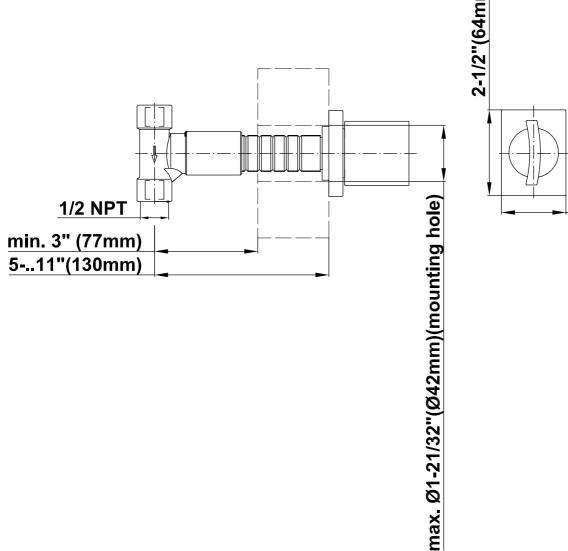









Finishes



24K Gold



Gold



24K Brushed Architectural Matte Black Olive Bronze Black™









Polished Chrome




Polished Nickel



SteeInox® (Satin Nickel)



G-1050Rough

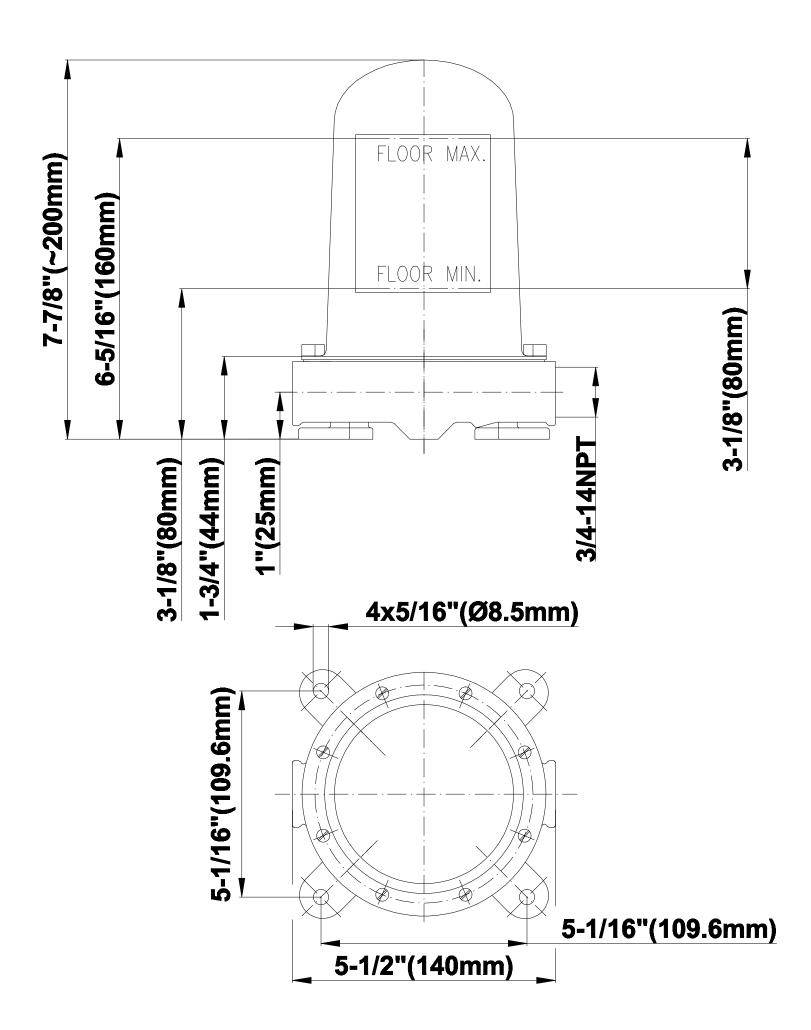







Information

- Floor-mounted spout installation
- Aerated Flow Rate ~10.6 gpm @45 psi
- 9-7/8" spout reach
- 37"- 40" ~spout height
- Optional in-line pressure balancing valve

Finishes



24K Gold



Gold



Black™



24K Brushed Architectural Matte Black Olive Bronze





Polished Chrome



Polished Nickel



SteeInox® (Satin Nickel)



Architectural White

G-1852-T SPOUT SADE Series

