


G-3652-C14U



Information

- Floor-mount installation
- Aerated Flow Rate ~9 gpm @45 psi
- 9-7/8" spout reach
 33-1/2" 36-5/8" ~spout height
- Optional in-line pressure balancing valve

G-3652 TARGA Series

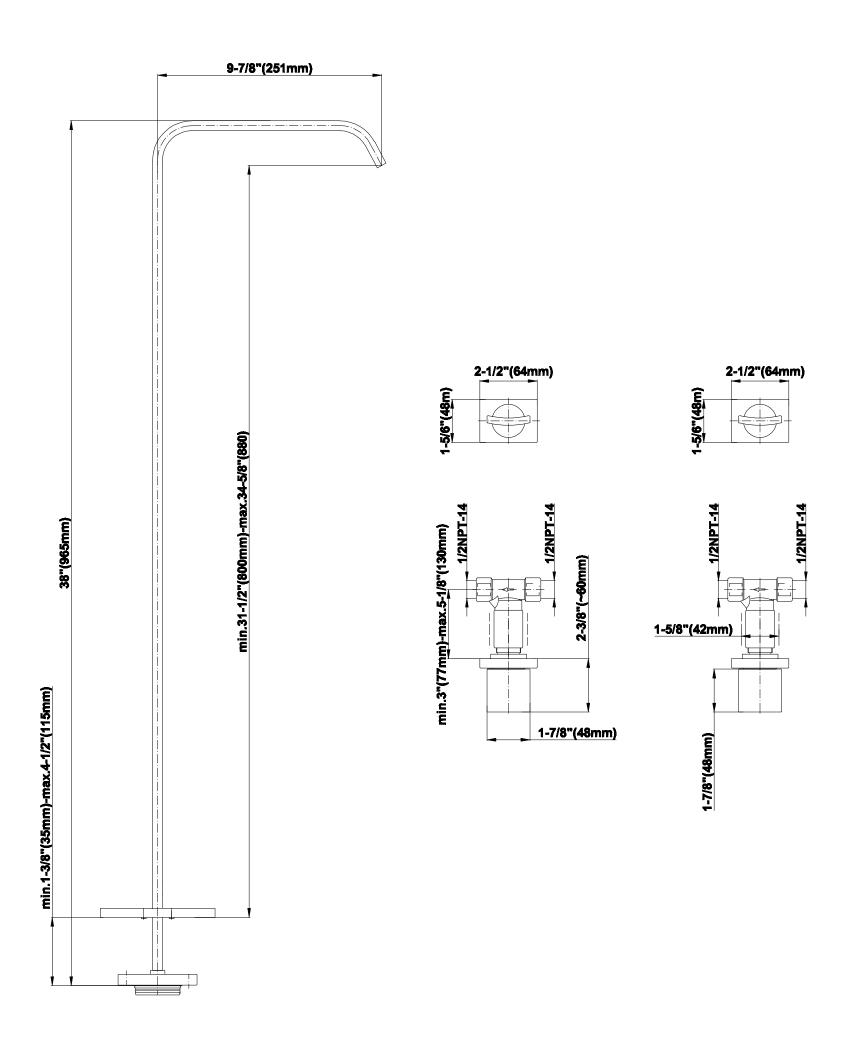





C14U-BS





Finishes



24K Gold



Gold



24K Brushed Architectural Black™



Brushed Nickel



Matte Black



Polished Chrome




Polished Nickel




SteeInox® (Satin Nickel)



C14U-BS, VS, WS LUNA, SADE, TARGA Series

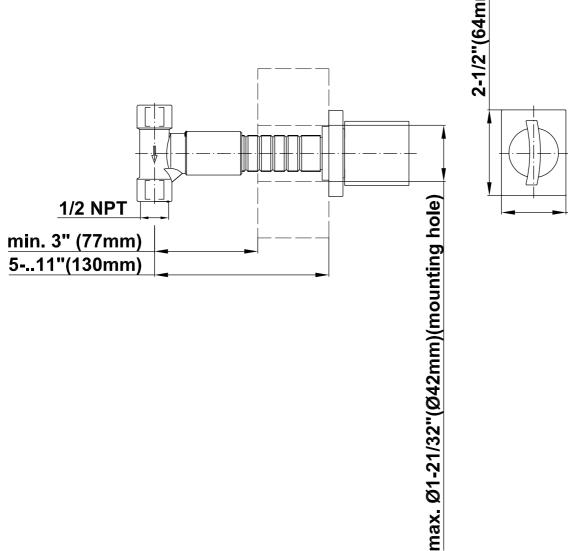









Finishes



24K Gold





24K Brushed Architectural Gold



Black™



Brushed Nickel



Matte Black



Polished Chrome




Polished Nickel



SteeInox® (Satin Nickel)



G-1050Rough

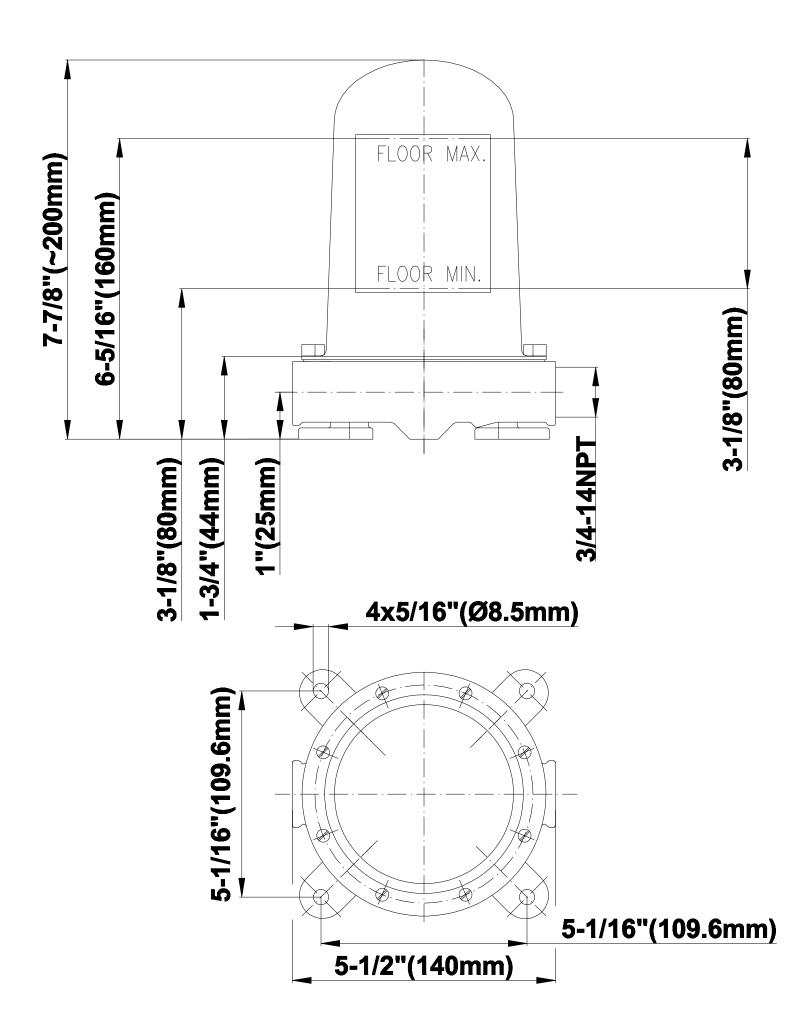







Information

- Floor-mount installation
- Aerated Flow Rate ~9 gpm @45 psi
- 9-7/8" spout reach
- 33-1/2" 36-5/8" ~spout height
- Optional in-line pressure balancing valve

Finishes



24K Gold



Gold



24K Brushed Architectural Black™



Brushed Nickel



Matte Black



Chrome



Polished Nickel



SteeInox® (Satin Nickel)



White

G-3652 TARGA Series

