BATHROOM Incanto Floor-Mounted Tub Filler G-11254-LM55N





Information

- Floor-mount installation
- Aerated flow rate ~9 gpm @45 psi
- Handshower flow rate \leq 1.5 max gpm
- 9-3/4" spout reach
- 30-7/16" to 33-9/16" ~ spout height
 Includes handshower with 59" spiral flexible hose
- Optional in-line pressure balancing valve





Product Features

- Floor-mount installation
- Aerated flow rate ~9 gpm @45 psi
- Handshower flow rate ≤1.5 max gpm
- 9-3/4" spout reach
- 30-7/16" to 33-9/16" ~ spout height
- Includes handshower with 59" spiral flexible hose
- Optional in-line pressure balancing valve

Available Finishes


- Polished Chrome
 G-11254-LM55N-PC
- Brushed Nickel
 G-11254-LM55N-BNI
- Polished Nickel
 G-11254-LM55N-PN
- Olive Bronze*
 G-11254-LM55N-OB*
- Brushed Gold*
 G-11254-LM55N-BAU*

* Special order finish- call for availability

Warranty

Limited lifetime warranty

For complete warranty information go to https://www.graff-faucets.com/en/info/ faqs

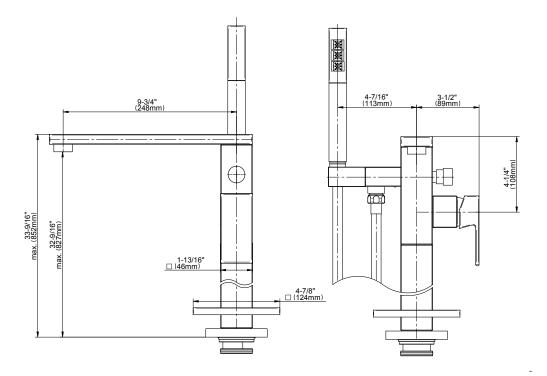

The measurements shown are for reference only. Products and specifications shown are subject to change without notice. Revised 5/2018 www.graff-designs.com | phone: 800-954-4723





Finishes



24K Gold



Gunmetal Distressed



24K Brushed Brushed Brass Architectural Gold PVD Black™






Brushed Onyx **PVD**®





Gunmetal







Polished Chrome

Polished Nickel

OR'osa PVD®



Architectural White






Product Features

- Mud guard displays minimum and maximum floor depth
- Rough can be installed in any orientation making it convenient to route pipes to the rough
- Trim can be rotated 360 degrees in any directions
- Averages 10 GPM with most trim

Warranty

Limited lifetime warranty


For complete warranty information go to http://www.graff-faucets.com/en/info/faqs

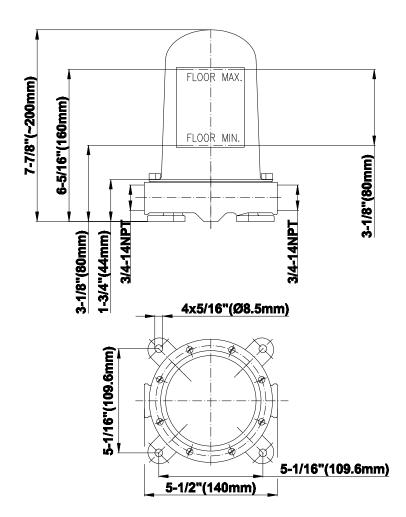

The measurements shown are for reference only. Products and specifications shown are subject to change without notice. Revised 07/2017. <u>www.graff-faucets.com</u> | phone: 800-954-4723

BATHROOM Incanto Floor-Mounted Tub Filler G-11254-LM55N



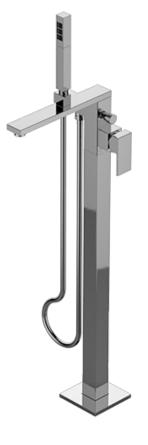

Information

- Floor-mount installation
- Aerated flow rate ~9 gpm @45 psi
- Handshower flow rate ≤1.5 max gpm
- 9-3/4" spout reach
- 30-7/16" to 33-9/16" ~ spout height
- Includes handshower with 59" spiral flexible hose
- Optional in-line pressure balancing valve

Finishes





Architectural White



Product Features

- Floor-mount installation
- Aerated flow rate ~9 gpm @45 psi
- Handshower flow rate ≤1.5 max gpm
- 9-3/4" spout reach
- 30-7/16" to 33-9/16" ~ spout height
- Includes handshower with 59" spiral flexible hose
- Optional in-line pressure balancing valve

Available Finishes


- Polished Chrome G-11254-LM55N-PC
- Brushed Nickel G-11254-LM55N-BNI
- Polished Nickel
 G-11254-LM55N-PN
- Olive Bronze*
 G-11254-LM55N-OB*
- Brushed Gold*
 G-11254-LM55N-BAU*

* Special order finish- call for availability

Warranty

• Limited lifetime warranty

For complete warranty information go to https://www.graff-faucets.com/en/info/faqs

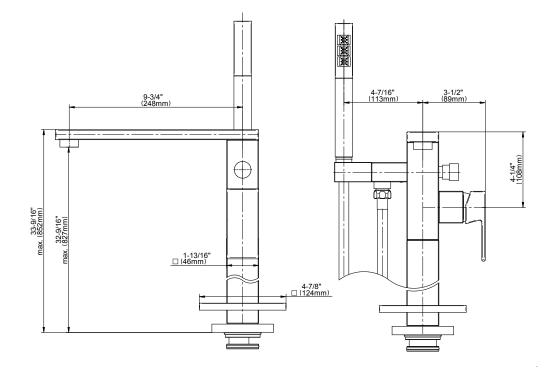

The measurements shown are for reference only. Products and specifications shown are subject to change without notice. Revised 5/2018
<u>www.graff-designs.com</u> | phone: 800-954-4723