SHOWER Traditional Exposed Thermostatic Tub and Shower System - w/Metal Handshower Handle **CD2.11-LM34S**





Information

- 1/2" Thermostatic Valve
- Stop/Volume Control Valves
- Showerhead, 12" shower arm, flange
- Includes matching handshower w/ metal handle
- Includes 59" shower hose
- Showerhead Features No-Clog, Easy-Clean Spray Nozzles
- Flow Rates: showerhead \leq 2.0 max gpm, handshower \leq 1.5 max gpm
- CALGreen

SHOWER Traditional 8" Showerhead **G-8410**





Information

- Sunflower shape
- 112 no-clog, easy-clean rubber spray nozzles
- Metal ball-joint allows for showerhead angle adjustment
- Showerhead flow rate $\leq 1.8 \text{ max gpm}$
- Recommend use with ceiling shower arm
- Recommended for use at no more than 10 degrees tilt

Nickel

CALGreen

Finishes








Olive Bronze

Chrome

Steelnox® (Satin Nickel)

G - 8410

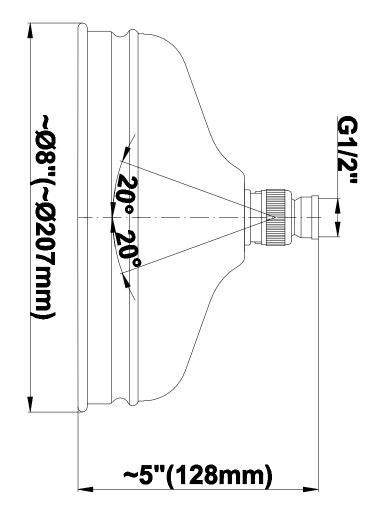



SHOWER Exposed Thermostatic Valve **G-8900**





Finishes



Olive Bronze




Chrome



Steelnox® (Satin Nickel)

G-8900 Exposed Thermostatic Valve

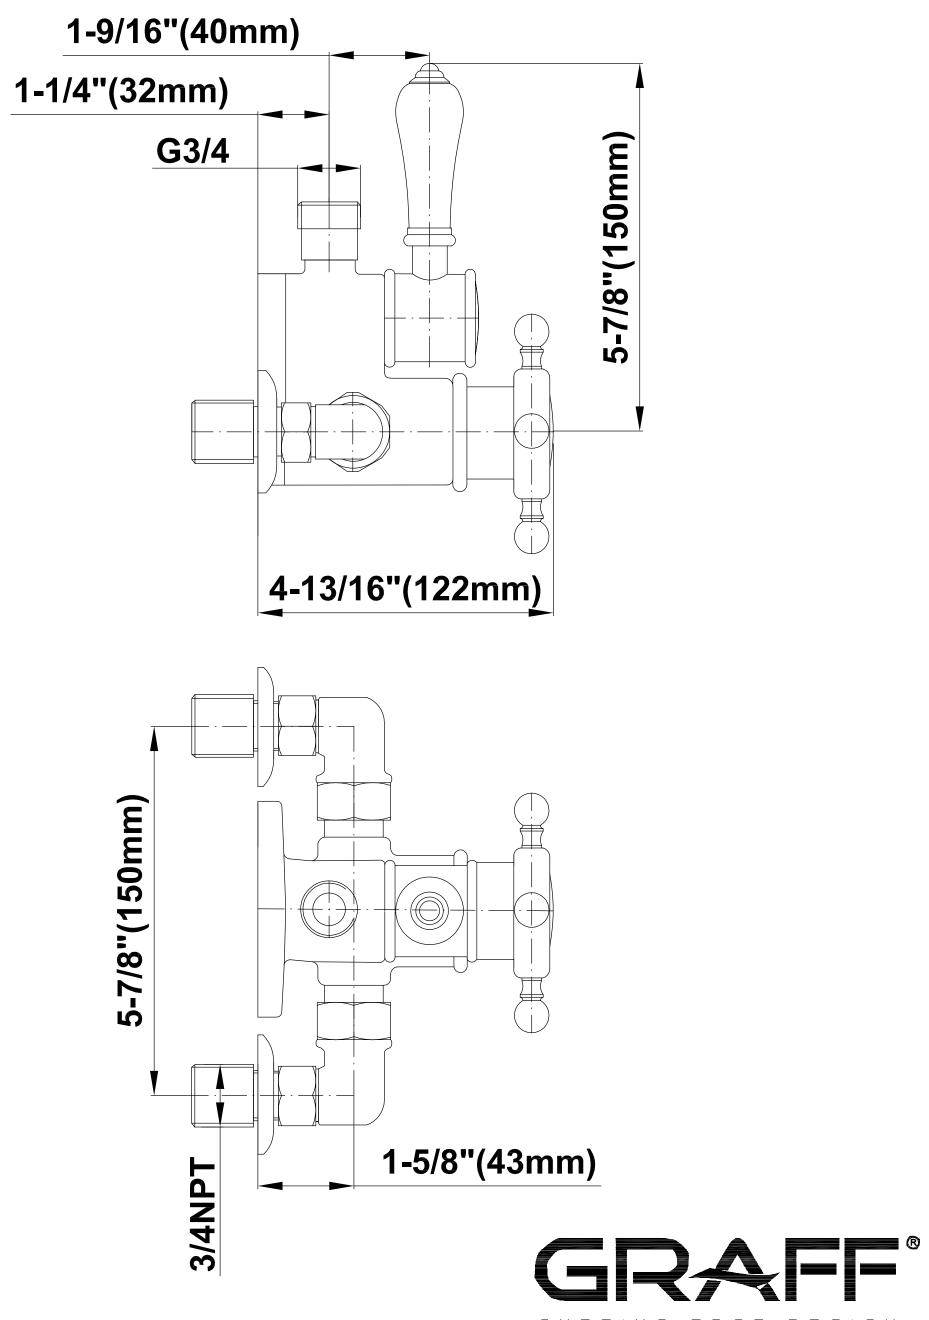

CUTTING EDGE DESIGN

SHOWER Exposed Riser with Handshower G-8932-LM34S





Information

- Includes matching handshower w/ceramic handle
- Includes 59" shower hose
- Optional Metal Handshower Handle Use code CD2.11-***-**
- CALGreen

Finishes



Olive Bronze



Chrome

Polished

Nickel



Steelnox® (Satin Nickel)

G-8932 Exposed Riser

