

FEATURES

- Single-hole mounting
- Flexible connections for easy installation
- 360° swivel spout
- Quarter-turn washerless ceramic disc valve
- 1.5 gal/min (5.7 l/min) maximum flow rate [max at 60 psi (4.14 bar)]
- Solid metal construction for durability and reliability
- Requires a water filtration system
- Compatible with KOHLER® Aquifer® Water Filtration System
- Complements contemporary kitchen solutions


CODES/STANDARDS APPLICABLE

Specified model meets or exceeds the following:

- ASME A112.18.1/CSA B125.1
- NSF/ANSI 61
- NSF/ANSI 372
- CSA B651
- ADA
- ICC/ANSI A117.1
- DOE - Energy Policy Act 1992
- California Energy Commission (CEC)
- All applicable US Federal and State material regulations

P23148

ADA	CSA B651
-----	----------

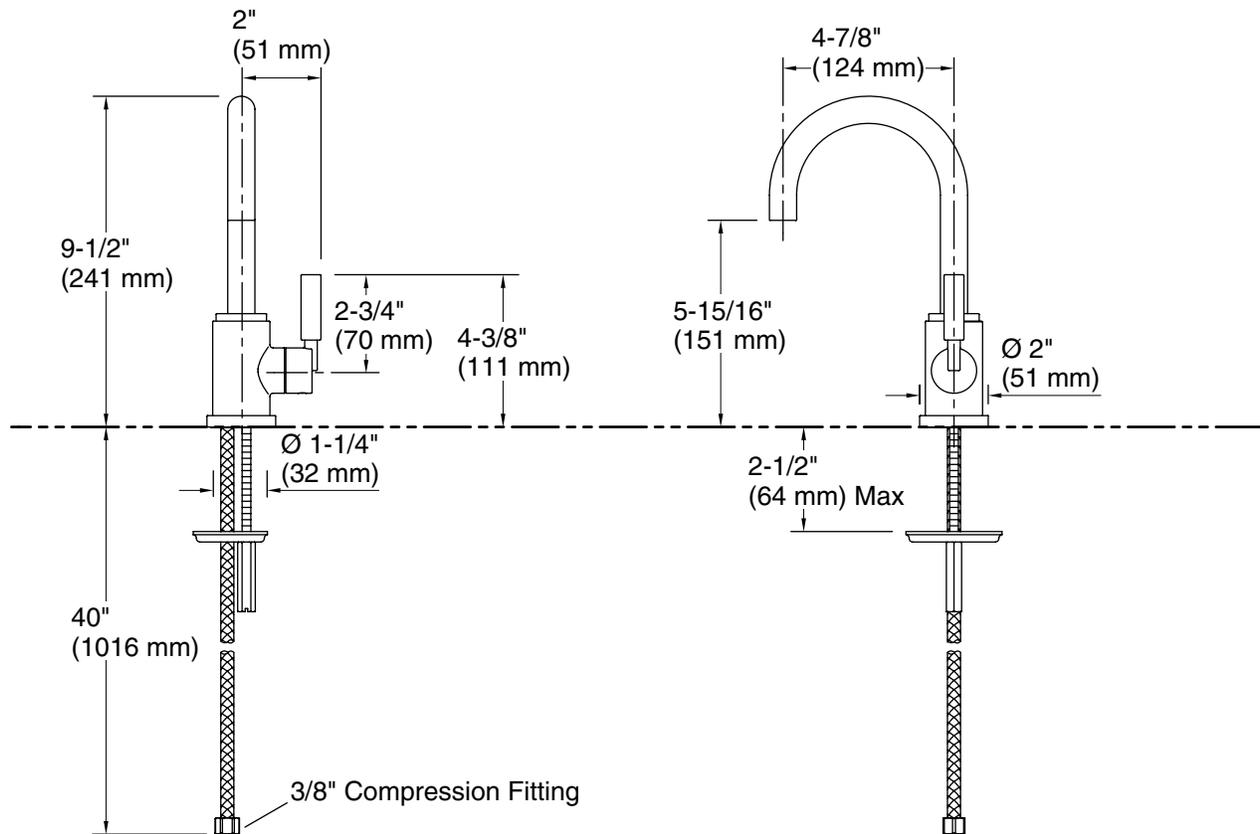

SPECIFIED MODEL

Model	Description	Finishes		
P23148-LV	Contemporary Filter Faucet	<input type="checkbox"/> CP Polished Chrome	<input type="checkbox"/> SN Polished Nickel	<input type="checkbox"/> BN Brushed Nickel
		<input type="checkbox"/> VS Stainless	<input type="checkbox"/> BL Matte Black	<input type="checkbox"/> ULB Unlacquered Brass
Recommended Accessories				
K-77685-NA	KOHLER Aquifer Single-Cartridge Water Filtration System	<input type="checkbox"/> NA		
K-77686-NA	KOHLER Aquifer Double-Cartridge Water Filtration System	<input type="checkbox"/> NA		

We reserve the right to make revisions without notice in the design of products or in packaging unless this right has specifically been waived at the time the order is accepted.