



#### **Features**

- 1.8 gal/min (6.8 /min) maximum flow rate at 60 psi (413.7 kPa).
- Two faucet holes.
- 9" depth provides generous workspace.
- SilentShield® sound-absorption technology offers quieter performance.
- With Malleco<sup>™</sup> pull-down kitchen faucet with soap/lotion dispenser in Vibrant Stainless.

#### Material

Premium 18-gauge stainless steel.

#### Installation

Top-mount or undermount.

### **Recommended Products/Accessories**

K-3129 Sink Rack K-8801 Sink Strainer K-8799 Sink Strainer

K-3132 Sink Rack

## **Optional Products/Accessories**

K-9000 P-Trap

### **Included Components**

Additional Components:

K-R562-SD Pull-down kitchen sink faucet w/ soap/lotion dispenser Installation hardware kitchen sink utility rack (K-5473-CHR) sink strainers (qty 2)



#### Codes/Standards


ASME A112.19.3/CSA B45.4 ASME A112.18.1/CSA B125.1 NSF/ANSI 61 NSF/ANSI 372 All applicable US Federal and State material regulations DOE - Energy Policy Act 1992 California Energy Commission (CEC)

Lifetime Limited Warranty for KOHLER® Stainless Steel Sinks KOHLER® Faucet Lifetime Limited Warranty KOHLER® One-Year Limited Warranty See website for detailed warranty information.





# Top-mount/undermount kitchen sink K-75791-2PC

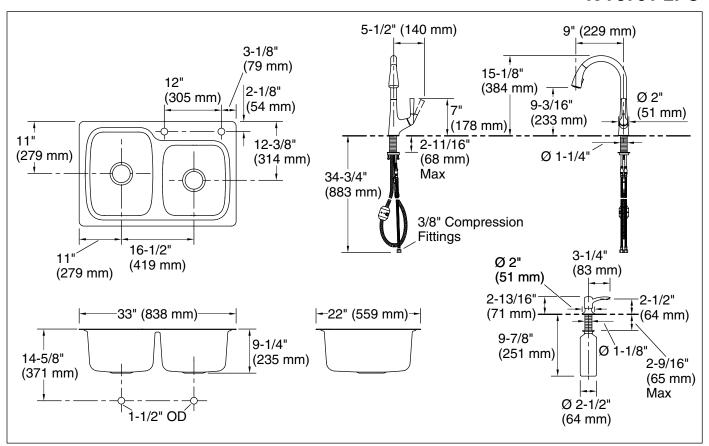

#### **Technical Information**

All product dimensions are nominal.

Installation: Top-mount

Min. base cabinet 36" (914 mm)

width:

Bowl area (Right): Length: 14-3/16" (360 mm)

Width: 15-11/16" (398 mm) Bowl depth: 9" (229 mm) Water depth: 9" (229 mm) Length: 14-3/16" (360 mm)

Bowl area (Left): Length: 14-3/16" (360 mm Width: 18-7/16" (468 mm) Bowl depth: 9" (229 mm)

Water depth: 9" (229 mm)

Number of deck holes: 2

Faucet hole(s): 1-7/16" (37 mm)
Soap/Lotion hole: 1-7/16" (37 mm)
Drain hole: 3-3/4" (94 mm)

Template: 1263722-7, required, included

#### **Notes**

Install this product according to the installation instructions.



