Wymara 4



Wymara 4 features a concealed drain cover. Shown above with cover removed.



44" x 14.5" x 5.375" Bowl: 42" x 12.5"

UNDERMOUNT ONLY

SculptureStone®

45 lbs / 20 kg

Sink Options and Pricing

Part #: MTCS774 \$1,610

Standard Color White, matte finish Biscuit Color Upgrade (SSBISNK) \$120 matte finish Additional material colors available for projects only. Please call MTI.

Hand-Polished Deep Gloss Finish Upcharge (SSGLOSSSNK3) \$715 For White or Biscuit

Quick Ship (QSPRI3) \$255 reduces lead time Please call for availability.

Options and Accessories

Teak Sink Tray

Slatted (TKST1) **\$190** Solid (TKST2) \$220

Drain Kits

- Integrated Overflow no charge Rear Overflow (SINKIOR), Front Overflow (SINKIOF)
- **Finger Touch Drain With Overflow** Chrome (DKFGC) \$185, Brushed Nickel (DKFGBN) \$180
- **Finger Touch Drain Without Overflow** Chrome (DKFGCN) \$185, Brushed Nickel (DKFGBNN) \$190

Grid Drain With Overflow Chrome (DKGDC) \$130, Brushed Nickel (DKGDBN) \$180


Grid Drain Without Overflow Chrome (DKGDCN) \$115, Brushed Nickel (DKGDBNN) \$180


Fixed Drain Without Overflow Chrome (DKFDC) \$300




Also available, Wymara Counter-Sink 4 (C874), featuring custom-size countertop with integrated bowl. Shown above with drain cover.



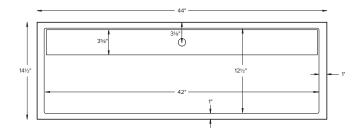





Due to its handcrafted nature, always measure sink on-site to ensure cut-out accuracy.



Shown above without drain cover.

ORDERING AND INSTALLATION

- 1.5" drain opening
- · Optional overflow available for undermount (check local codes)
- Undermount only. Measure on site to achieve the proper cut-out size.
- · Lip detail will accommodate commonly used undermount hardware. Undermount hardware is not included.
- One-piece construction using Engineered SculptureStone® (ESS) material.
- · Non-porous, stain-, mold- and mildew-resistant SculptureStone®
- Material is approximately 70% organic
- Five-Year Limited Residential Warranty

Before discarding packaging, check for accessories that may be inside.
All product measurements are ±1/2".
Specifications and configurations are subject to change without notice.
Measurements herein supersede all others published prior to publication date below.