

Strom Plumbing

Sign of  the Crab

Ph: (916) 638-2722 / Fax: (916) 638-2725


Installation Information

ITEM #P1132

Thermostatic Deck Mount Faucet, Variable Centers

Warranted only when installed by a qualified, licensed plumber. Please use Teflon tape on all threaded connections.

1. Shut off the water supply to the fixture before installation.
2. Connect the shorter threaded ends of the hook-up nipples to the deck mount couplers.
3. Loosely attach the deck mount coupler nuts and screen washers to the faucet. Insert the nipples through the 2 holes in the deck. Screw the lock nuts onto the threaded nipples and tighten to secure faucet to deck/tub.
4. Tighten the nuts of the deck mount couplers to the faucet body once positioned correctly.
5. Make no adjustments to valves or valve stems. They are tested at the factory for optimum performance.

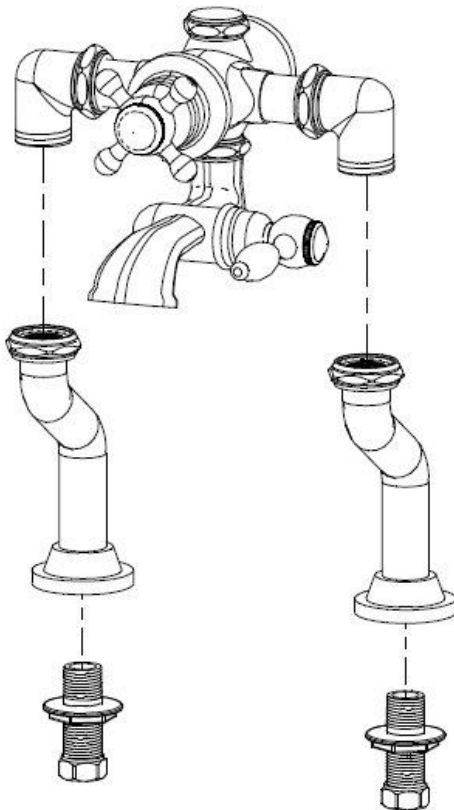

Parts Included:

- Thermostatic Faucet Body
- Deck Mount Couplers w/screen washers (pair)
- Nipple hook-up kit