



SS-PB50

Remote Pressure Balance Valve, 1/2"

To provide protection from pressure fluctuations between hot and cold lines for sink faucets, tub faucets, and showerheads. Please observe local plumbing and building codes and verify if the SS-PB50 remote pressure balance valve is required.

Notes:

- Should be installed upstream of the fixture control valves.
- Must be installed in an accessible location to allow for future servicing.
- Check valves (not supplied) must be installed at the inlets to prevent potential cross connection and provide backflow prevention.
- Plumbing codes may require hot water to be limited to 120°F (49°C).

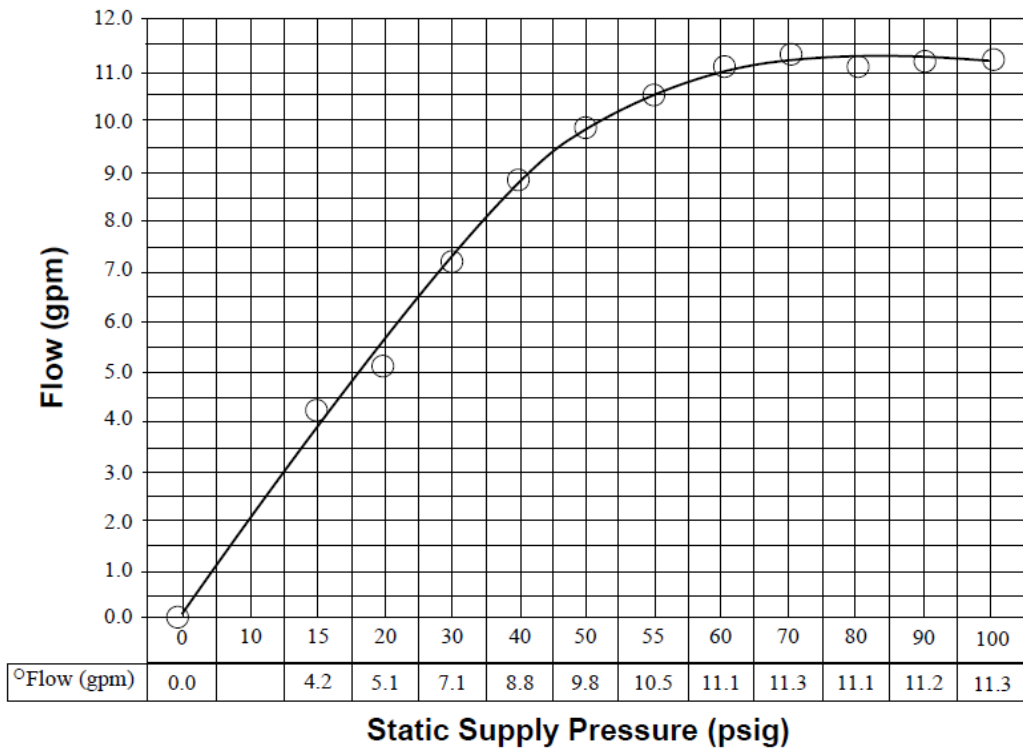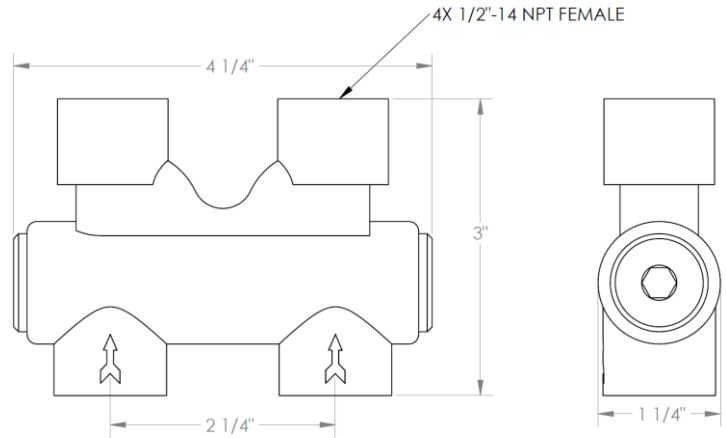

Meets the requirements of ASSE 1066-97 "Performance Requirements for Individual Pressure Balancing In-Line Valves for Individual Fixture Fittings. UPC® and low-lead compliant.