

BT0402.02 SPECIFICATIONS

coco·2 blu·stone™ freestanding bathtub

FEATURES:

- Freestanding, blu·stone™ bathtub
- Streamlined, high profile one piece design
- 59" (1500mm) L x 31½" (800mm) W x 23" (585mm) H
- Includes integral slot overflow & matching blu·stone™ waste cover
- Made of blu·stone™ providing the look and feel of natural stone
- Stronger and more durable than acrylic
- Non-porous, stain resistant surface that does not require sealing
- Does not promote bacteria, mold or fungi
- Condo series - ideally proportioned for smaller spaces
- Tailpiece not included (Blu recommends BTWaste.RN or BTWaste.Cl.RN)

SPECIFICATIONS:

Basin Area:	48½" (1232mm) x 23½" (600mm)*
Top Area:	57" (1450mm) x 29½" (750mm)*
To Overflow:	2¼" (60mm)*
Water Depth:	17" (430mm)*
Slope of Backrest:	77°*
Capacity:	74G (280L)*
Weight:	407lbs (185kg)*
Hot water supply req'd:	Should be 70% of water capacity of tub or greater
Warranty:	Five Year Warranty (Residential use) One Year Warranty (Commercial use)
Material:	blu·stone™
Shipping Weight:	540lbs (245kg)*
Shipping Dimensions	(LWH) 61¾" x 34¼" x 24¾" (1570mm x 870mm x 630mm)*

COLORS/FINISHES:

- White Matte as standard
- Gloss finish & custom colors available (Tier 1/ custom)

ACCESSORIES (sold separately):





- BTWaste.RN or BTWaste.Cl.RN Island tub drain for easy installation

INSTALLATION NOTES:

Install this product according to the installation guide. Floor support under bath must provide for a minimum of 1400 lbs (635kg). Installation will vary. Our products must be installed by certified professionals only and according to our installation guide as well as federal, provincial / state and local building codes and regulations

CODES / STANDARDS APPLICABLE:

- Meets or exceeds ANSI / ASME standard
CSA B45.5.11 / IAPMO Z124
- IAPMO / ANSI Z124.8
- CSA

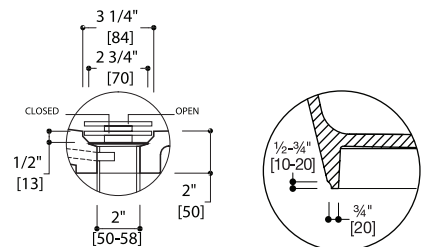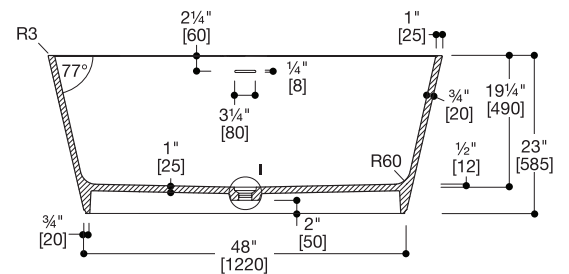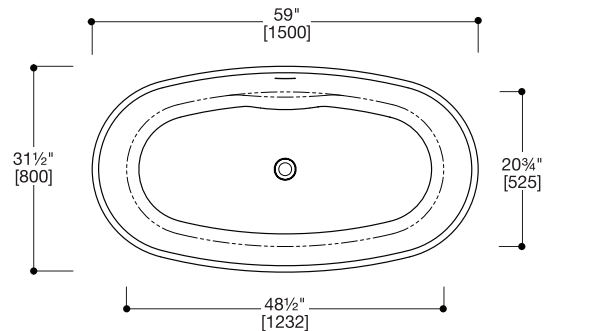

DETAIL I

DETAIL II



*Approximate measurements for comparison only.

Note: These dimensions and specifications are subject to change without notice.