BT8004B16 SPECIFICATIONS

coco acrylic freestanding bathtub

FEATURES:

- Freestanding, acrylic bathtub with slot overflow
- Streamlined, high profile and seamless one piece design
- 621/4" (1580mm) L x 291/4" (740mm) W x 221/2" (570mm) H
- Sleek, thin profile rim
- Includes white matte or gloss waste
- Tailpiece not included (Blu recommends BTWaste.RN or BTWasteCI.RN)

SPECIFICATIONS:

Basin Area: 431/4" (1100mm) x 18" (460mm)*

Top Area: 60¾" (1540mm) x

27½" (700mm)*

To Overflow: 21/4" (60mm)*
Water Depth: 151/4" (390mm)*
Capacity: 66G (250L)*

Slope of Backrest: 64°*

Weight: 79lbs (36kg)*

Hot water supply req'd: Should be 70% of water

capacity of tub or greater

Warranty: Five Year Warranty (Residential use)

One Year Warranty (Commercial use)

Material: Acrylic Shipping Weight: 101lbs (46kg)*

Shipping Dimensions: (LWH) $64\frac{1}{2}$ " x 30" x $23\frac{1}{4}$ "

(1640mm x 760mm x 600mm)*

FINISH:

White Matte and Gloss finish as standard

ACCESSORIES (sold separately):

- BTWaste.RN or BTWasteCl.RN Island tub drain for easy installation


INSTALLATION NOTES:


Install this product according to the installation guide. Floor support under bath must provide for a minimum of 1400 lbs (635kg). Installation will vary. Our products must be installed by certified professionals only and according to our installation guide as well as federal, provincial / state and local building codes and regulations


CODES / STANDARDS APPLICABLE:

- Meets or exceeds ANSI / ASME standard Z124.1.2 and CAN / CSA B 45 requirements
- IAPMO / UPC / cUPC



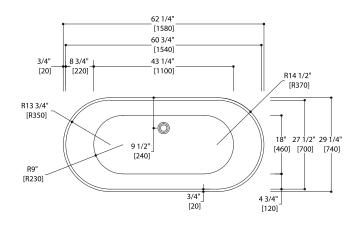









*Approximate measurements for comparison only.

Note: These dimensions and specifications are subject to change without notice.

