KOHLER_®

Features

- Two-piece toilet.
- Round-front bowl offers an ideal solution for smaller baths and powder rooms.
- 1.28 gallons per flush (gpf).
- Right-hand trip lever included.
- Tank locks included.
- Combination consists of the K-4467-TR tank and the K-4197 bowl.
- Coordinates with other products in the Wellworth collection.

Technology

- Single-flush gravity uses the force of gravity and a precision-engineered tank, bowl, and trapway to create a strong siphon during flushing.
- KOHLER's canister flush valve harnesses the natural force of gravity and optimizes flushing performance.
- Class Five[®] flushing technology offers virtually plug-free performance and rinsing power for a clean bowl.

Installation

- Standard 12-inch rough-in.
- Three-bolt installation.
- Seat and supply line not included.

Water Conservation & Rebates

- WaterSense[®] toilets meet strict EPA flushing guidelines, including using at least 20 percent less water than 1.6-gallon toilets.
- Eligible for consumer rebates in some municipalities.

Recommended Products/Accessories

K-4639 Cachet® Quiet-Close™ Round-Front Toilet Seat K-5589 Purefresh® Round-Front Toilet Seat K-76923 Puretide™ Quiet-Close™ round-front manual cleansing toilet seat K-5420 Low-Profile Bolt Caps K-9379 Trip Lever 1023457 Wax Ring/Hardware Kit 1265114 Connector Hose

Included Components

Product consists of: K-4197 Round-Front Bowl K-4467-TR Toilet Tank Additional Components: Bolt cap accessory pack Tank accessory pack Tank cover Trip lever



Wellworth®

K-3997-TR

Class Five® Toilet



Codes/Standards

ASME A112.19.2/CSA B45.1 DOE - Energy Policy Act 1992 EPA WaterSense®

KOHLER® One-Year Limited Warranty

See website for detailed warranty information.

Available Colors/Finishes

Color tiles intended for reference only.

Color Code Description

0	White
96	Biscuit
47	Almond






Wellworth®

Class Five® Toilet

K-3997-TR

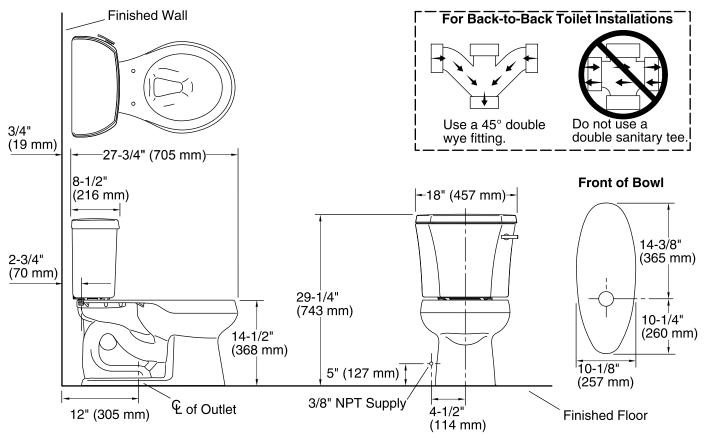

Technical Information

All product dimensions are nominal.		
Toilet type:	Two-piece, Floor-mount	
Waste Outlet:	Floor	
Bowl shape:	Round-front	
Flush type:	Class Five®	
Trap passageway:	2-1/8" (54 mm)	
Water Consumption		
Full:	1.28 gpf (4.8 lpf)	
Water surface size:	10-1/2" x 7-3/4" (267 mm x 197 mm)	
Rim to water surface:	5-1/4" (133 mm)	
Rough-in:	12" (305 mm)	
Seat-mounting holes:	5-1/2" (140 mm)	

Notes

Install this product according to the installation instructions.

For back-to-back toilet installations: Use only a 45° double wye fitting.

