

# wall-mount electronic faucet EX04A/EX04A.5/EX04A.35

### Specifications:

wall- mount 1-hole, touch-free Installation: H: 2 1/2" SPOUT: 9 7/8" **Exterior Dimensions:** 

Material: solid brass construction

Water use: 1 GPM (EX04A), 0.5 GPM (EX04A.5), 0.35 GPM (EX04A.35)

Power supply: AC/DC

Finishes: CR - polished chrome

> PN - polished nickel NI - brushed nickel BG - brushed gold 44 - matte black TN - titanium

Ø 1" **Cutout Size:** 

**Accessories included:** 25" pvc pipes with elbows

power adapter, flexible supply

line F 1/2" and battery box



#### Warnings:

-NO REFLECTIVE MIRROR-LIKE SURFACES SHOULD BE INSTALLED UNDERNEATH THE INFRARED SENSOR REGARDLESS OF THE DISTANCE

-MINIMUM DISTANCE BETWEEN SENSOR AND TOP/SINK SURFACE MUST BE 10" OR MORE; ANY SHORTER DISTANCE WILL CAUSE MULFUNCTION OF THE SENSOR

#### Features:

Power supply options:

AC - transformer with a plug to electricity and/or

DC - battery pack for 4 x AA alkaline batteries (batteries not included)
- on average lasts for 108,000 use cycles

For cold or premixed water (mixer sold separately)

10 seconds metering cycles

Sensing distance by default: 4" (10cm)

Sensing range: 4"-10" (10cm - 25cm) adjustable with a magnet

Water pressure: 15-90 PSI, recommended 43.5 PSI

Water temperature: 34-120° Fahrenheit (1-50° Celsius)

## Codes + Standards:

- Meets and exceeds applicable national codes and standards
- 1 GPM Watersence certified (EX04A)
- 0.5 GPM CAL-Green compliant (EX04A.5)
- 0.35 GPM LEED Credit (EX04A.35)




compliant when installed to specific requirements of this regulation

#### Recommended Items:

- Replacement parts:
  - #4ABATPK relacement battery pack
  - #EX04A-SENR replacement sensor
- Mixing valves (sold separately)
  - #EX20A mechanical mixing valve
  - #EX25A integrated thermostatic valve
- American size grid drains
  - #7100-18 without overflow holes
  - #7100-180F with overflow holes

1 7/8" 48

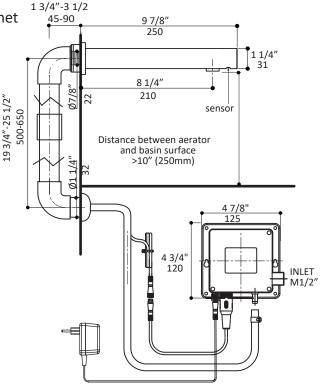

LACAVA reserves the right to revise any dimension or information on this sheet without notice. Dimensions are nominal and may vary within an industry accepted tolerance of 1/4". Drawings provided herein are meant to give the user an idea of the product and are not made to scale. Location of plumbing is meant for reference, your specific applicatuion may vary. Revised: 5/6/2019